


Models 7-S-204, 7-S-232, 7-S-240, 7-S-242, 7-S-258, 7-S-260, 7-S-261 (5709 Chassis)

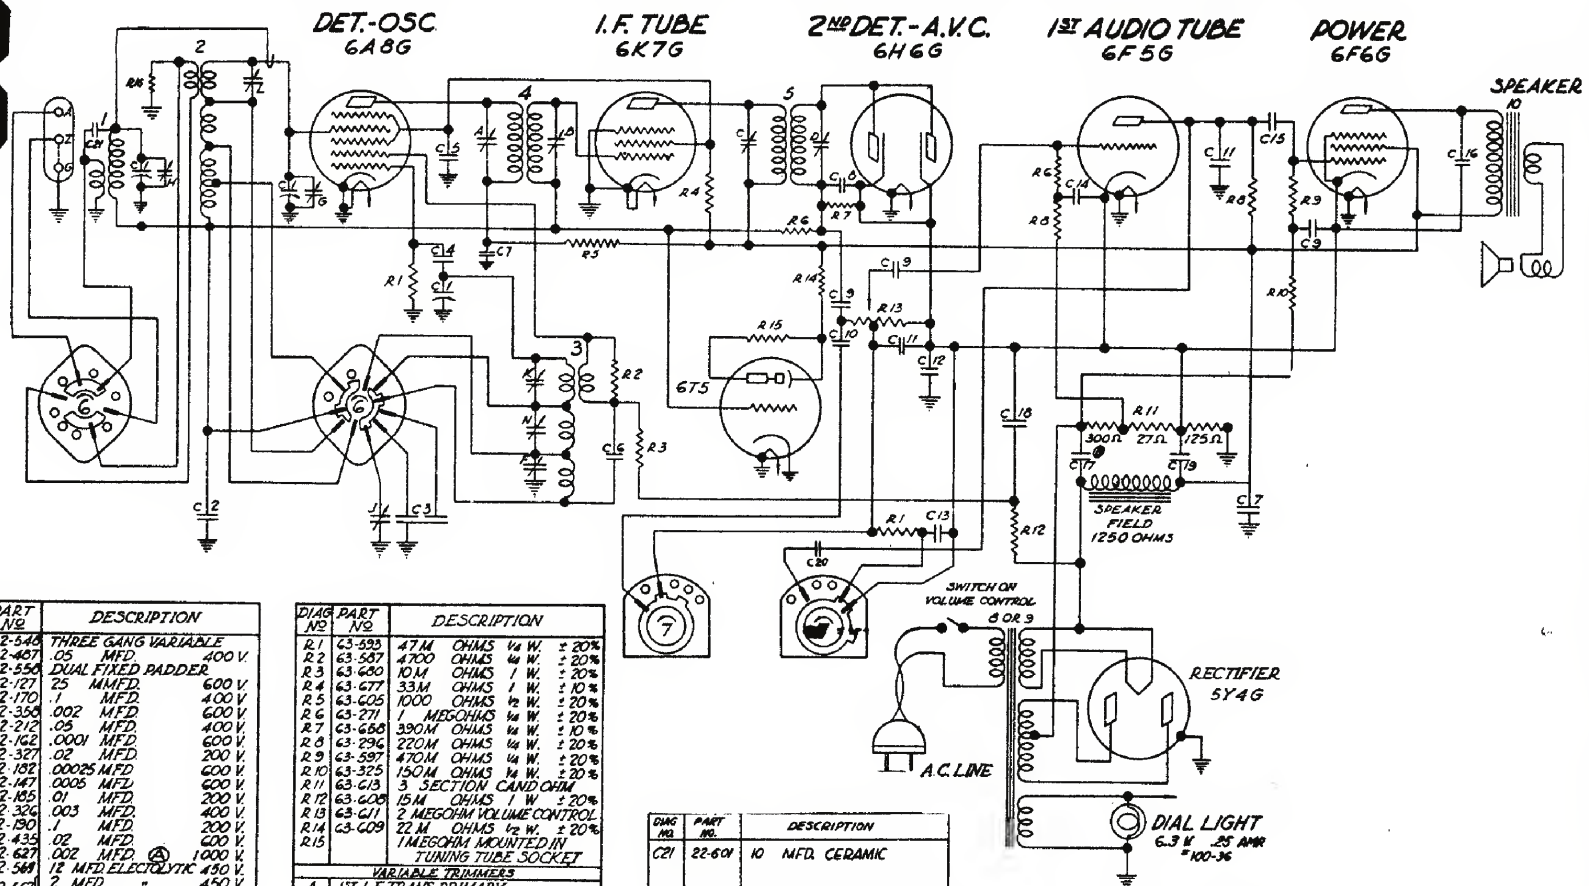

DIAG. NO.	PART NO.	DESCRIPTION
C1	22-546	THREE GANG VARIABLE
C2	22-467	.05 MFD. 400 V.
C3	22-550	DUAL FIXED PADDER
C4	22-727	25 MMFD. 600 V.
C5	22-170	.1 MFD. 400 V.
C6	22-350	.002 MFD. 600 V.
C7	22-212	.05 MFD. 400 V.
C8	22-162	.0001 MFD. 600 V.
C9	22-327	.02 MFD. 200 V.
C10	22-132	.00025 MFD. 600 V.
C11	22-147	.0005 MFD. 600 V.
C12	22-155	.01 MFD. 200 V.
C13	22-326	.003 MFD. 400 V.
C14	22-190	.1 MFD. 200 V.
C15	22-435	.02 MFD. 600 V.
C16	22-527	.002 MFD. 1000 V.
C17	22-548	12 MFD. ELECTROLYTIC 450 V.
C18	22-562	2 MFD. 450 V.
C19	22-562	16 MFD. 450 V.
C20	22-440	.004 MFD. 600 V.
1	3-4760	ANTENNA COIL ASSEMBLY
2	3-5054	DETECTOR COIL & SHIELD ASSEM.
3	3-4969	OSCILLATOR COIL & SHIELD ASSEM.
4	35-416	1ST I.F. TRANS.
5	35-417	2ND I.F. TRANS.
6	35-110	BAND SELECTOR SWITCH
7	35-106	TONE CONTROL SWITCH
8	35-418	POWER TRANS. 117V. 50-60 CYCLE
9	35-451	POWER TRANS. ALL VOLTAGE 250V. 100-36
10		SPEAKER TRANSFORMER

DIAG. NO.	PART NO.	DESCRIPTION
R1	63-593	47M OHMS 1/4 W. ± 20%
R2	63-587	4700 OHMS 1/4 W. ± 20%
R3	63-630	10M OHMS 1 W. ± 20%
R4	63-677	33M OHMS 1 W. ± 10%
R5	63-605	1000 OHMS 1/2 W. ± 20%
R6	63-271	1 MEGOHM 1/4 W. ± 20%
R7	63-680	390M OHMS 1/4 W. ± 10%
R8	63-296	220M OHMS 1/4 W. ± 20%
R9	63-597	470M OHMS 1/4 W. ± 20%
R10	63-325	150M OHMS 1/4 W. ± 20%
R11	63-613	3 SECTION CAND. OHM
R12	63-608	15M OHMS 1 W. ± 20%
R13	63-611	2 MEGOHM VOLUME CONTROL
R14	63-609	22 M OHMS 1/2 W. ± 20%
R15		1 MEGOHM MOUNTED IN TUNING TUBE SOCKET
VARIABLE TRIMMERS		
A		1ST I.F. TRANS. PRIMARY
B		1ST I.F. TRANS. SECONDARY
C		2ND I.F. TRANS. PRIMARY
D		2ND I.F. TRANS. SECONDARY
E		BROADCAST OSCILLATOR (SEE NOTE)
F		DETECTOR BROADCAST (ON GANG)
G		ANTENNA BROADCAST (ON GANG)
H		22-515 BROADCAST PADDER
I		SHORT WAVE OSCILLATOR (SEE NOTE)
J		SHORT WAVE DETECTOR (SEE NOTE)
K		POLICE BAND OSCILLATOR (SEE NOTE)
L		
M		
N		
NOTE: TRIMMERS F, K, L & N MOUNTED ON BAKELITE STRIP #22-549		

DIAG. NO.	PART NO.	DESCRIPTION
C21	22-604	10 MFD. CERAMIC
R16	63-383	1000 OHMS 1/4 W. ± 20%

SPEAKERS	MODELS
49-203	7-S-232
49-206	7-S-240
49-206	7-S-242
49-181	7-S-258
49-195	7-S-260
49-195	7-S-261

I.F. - FREQUENCY 456 K.C.
 7 TUBE SUPERHETERODYNE
 3 BAND
 CHASSIS NO 5709
 ZENITH RADIO CORP.